




Manitou MEWP Range

Discover a wide range of lifting, industrial and rough terrain platforms, direct response to your business concerns, indoors or outdoors, whether rental activities or end user needs.



- Network of dealers
- Maintenance contracts
- Financing
- Warranty extension
- Fleet management
- Second-hand
- Original spare parts

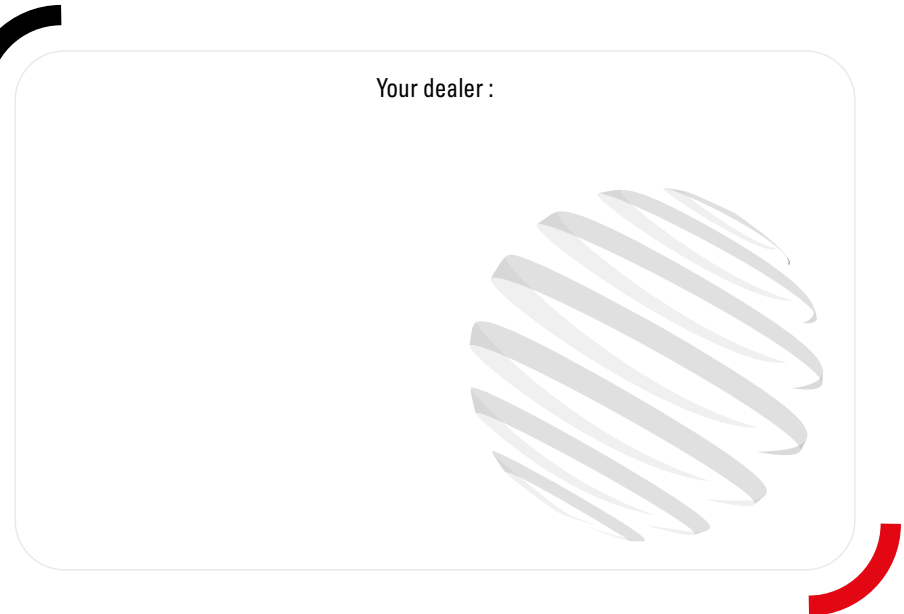

Registered office
 B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
 Tél : 00 33 (0)2 40 09 10 11 - Fax : 00 33 (0)2 40 09 10 97
 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ according to the equipment. The equipment presented in this brochure may be part of a series, optional or unavailable, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and presented. The specifications provided are not binding on the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. The list of specifications is not exhaustive. The logos, as well as the visual identity of the company, are owned by Manitou and cannot be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes. Manitou BY SA - Listed company with board of directors - Share capital: 39,547,024 euros - 837 802 588 RCS Nantes

70080VEN_E_0020_AWP_FrangeRT

MEWP

INDUSTRIAL & ROUGH TERRAIN PLATFORMS



FULL RANGE

Handling your world

The Manitou group is a global market leader in rough-terrain material handling. It designs, manufactures, distributes and services equipment for the construction, agriculture and industry sectors.

The Group's product ranges include rough-terrain fixed, rotating and heavy-duty telehandlers, rough-terrain, semi-industrial and industrial forklift trucks, wheeled or tracked skid steers, articulated loaders, backhoe loaders, aerial work platforms, truck-mounted forklifts, warehousing equipment and attachments.

Through its iconic brands – Manitou, Gehl and Mustang by Manitou – and its worldwide network of 2,000 dealers, the Group offers the best solutions to create optimum value for its customers.

With its registered office in France, in 2019 the group recorded revenue of 2.1 billion euros in 140 countries, and employs 4,600 people, all committed to delivering customer satisfaction.



Semi rough terrain MAN'GO



	MAN'GO12
Working height (m)	11.91
Platform height (m)	9.91
Platform capacity (kg)	230
Working outreach (m)	6.69
Overhang (m)	4.8
Dimensions overall (L x W x h)	5.5 x 1.8 x 2.01
Dimensions for transport (L x W x h)	4.5 x 1.8 x 2.49
Platform dimensions (L x W)	1.5 x 0.98
Engine or battery power (kW - V/Ah)	Kubota - 18.5 Stage V
Tyres	Cured-on solid
Platform weight (kg)*	4150

Rough terrain Articulated



	160 ATJ	160 ATJ+	180 ATJ	200 ATJ	200 ATJ E
Working height (m)	16.01	16.21	18.19	20	20
Platform height (m)	14.01	14.21	16.19	18	18
Platform capacity (kg)	230	408	230	230	230
Working outreach (m)	8.3	8.52	10.51	12	11.57
Overhang (m)	7.38	7.40	7.55	8	7.90
Dimensions overall (L x W x h)	6.68 x 2.32 x 2.37	7.09 x 2.45 x 2.47	7.79 x 2.32 x 2.32	8.5 x 2.4 x 2.71	8.34 x 2.32 x 2.46
Dimensions for transport (L x W x h)	4.44 x 2.32 x 2.63	4.89 x 2.45 x 2.94	5.56 x 2.32 x 2.56	6.30 x 2.4 x 3.15	6.06 x 2.32 x 2.71
Platform dimensions (L x W)	1.8 x 0.8	2.3 x 0.9	1.8 x 0.8	2.1 x 0.8	1.5 X 0.75
Engine or battery power (kW - V/Ah)	Kubota - 18.5 Stage V	Kubota - 18.5 Stage V	Kubota - 18.5 Stage V	Kubota - 33.1	48 / 460
Tyres	Foam filled	Foam filled	Foam filled	Cured-on solid	Solid Non-marking
Platform weight (kg)*	6118	7500	7430	10050	7100

Rough terrain Telescopic



	220 TJ	220 TJ+	260 TJ+	280 TJ
Working height (m)	21.77	21.74	25.89	27.73
Platform height (m)	19.77	19.74	23.89	25.73
Platform capacity (kg)	230	408	408	350/240
Working outreach (m)	17.63	17.79	19.7	21.45
Ground clearance (m)	0.44	0.44	0.42	0.42
Dimensions overall (L x W x h)	9.81 x 2.48 x 2.66	10.06 x 2.48 x 2.66	10.84 x 2.48 x 2.71	11.35 x 2.48 x 2.73
Dimensions for transport (L x W x h)	7.29 x 2.48 x 2.72	7.36 x 2.48 x 3.03	7.88 x 2.48 x 2.80	8.09 x 2.48 x 2.71
Platform dimensions (L x W)	2.1 x 0.8	2.3 x 0.9	2.3 x 0.9	2.3 x 0.9
Engine or battery power (kW - V/Ah)	Kubota - 26.2	Kubota - 26.2	Kubota - 33.6	Kubota - 33.6
Tyres	Cured-on solid	Cured-on solid	Cured-on solid	Cured-on solid
Platform weight (kg)*	11850	13600	16400	16500

Rough terrain Scissors



	100 SC	120 SC	140 SC
Working height (m)	9.70	11.75	14.12
Platform height (m)	7.70	9.75	12.12
Platform capacity (kg)	680	454	363
Dimensions overall (L x W x h)	3.76 x 1.75 x 2.59	3.76 x 1.75 x 2.59	3.76 x 1.75 x 2.59
Dimensions with rails lowered (L x W x h)	3.12 x 1.75 x 1.92	3.12 x 1.75 x 1.92	3.12 x 1.75 x 2.08
Platform extension (m)	1.52	1.52	1.52
Ground clearance (m)	0.24	0.24	0.24
Travel speed (km/h)	5.6	5.6	5.6
Engine or battery power (kW - V/Ah)	Kubota - 18.5	Kubota - 18.5	Kubota - 18.5
Tyres	Foam filled	Foam filled	Foam filled
Platform weight (kg)*	3768	3949	5136

Industrial Articulated



	120 AETJ-C	150 AETJ-C	170 AETJ-L	150 AETJ-L BI-energy	170 AETJ-L BI-energy
Working height (m)	11.95	15	16.9	15.4	17
Platform height (m)	9.95	13	14.9	13.4	15
Platform capacity (kg)	200	200	200	230	230
Working outreach (m)	7	7.6	9.43	7.81	9.43
Overhang (m)	6.4	7.15	7.15	7.27	7.27
Dimensions overall (L x W x h)	5.48 x 1.2 x 1.99	6.05 x 1.5 x 1.97	6.84 x 1.75 x 1.97	6.11 x 1.9 x 2.1	6.97 x 1.9 x 2.1
Dimensions for transport (L x W x h)	3.74 x 1.2 x 2.16	4.4 x 1.5 x 2.08	5.12 x 1.75 x 2.04	4.55 x 1.9 x 2.13	5.25 x 1.9 x 2.13
Platform dimensions (L x W)	1.2 x 0.92	1.2 x 0.92	1.2 x 0.92	1.2 x 0.92	1.2 x 0.92
Battery capacity / voltage (Ah / V)	240 / 48	240 / 48	240 / 48	300 / 48	300 / 48
Tyres	Solid non-marking	Solid non-marking	Solid non-marking	Foam filled non-marking	Foam filled non-marking
Platform weight (kg)*	6660	6700	6910	6435	7435

Industrial Vertical mast



	80 VJR	100 VJR	90 V'air
Working height (m)	7.65	9.85	9
Platform height (m)	5.65	7.85	7
Platform capacity (kg)	200	200	230
Working outreach (m)	3.24	3.15	2.04
Overhang (m)	4.23	6.67	-
Dimensions overall (L x W x h)	2.95 x 0.99 x 1.99	2.8 x 0.99 x 1.99	2.31 x 1.1 x 2.31
Dimensions for transport (L x W x h)	2.95 x 0.99 x 1.99	2.8 x 0.99 x 1.99	2.31 x 1.1 x 2.31
Platform dimensions (L x W)	1.11 x 0.93	1.11 x 0.93	0.95 x 0.68
Battery capacity / voltage (Ah / V)	250 / 24	250 / 24	250 / 24
Tyres	Solid non-marking	Solid non-marking	Solid non-marking
Platform weight (kg)*	2250	2650	2710

Industrial Scissors



	78 SEC	100 SEC	120 SE
Working height (m)	7.79	9.92	11.75
Platform height (m)	5.79	7.92	9.75
Platform capacity (kg)	227	227	318
Dimensions overall (L x W x h)	1.83 x 0.81 x 2.1	2.26 x 0.81 x 2.26	2.44 x 1.17 x 2.39
Dimensions with rails lowered (L x W x h)	1.83 x 0.81 x 1.75	2.26 x 0.81 x 1.91	2.44 x 1.17 x 1.8
Platform extension (m)	0.91	0.91	0.91
Ground clearance (m)	0.1	0.1	0.1
Travel speed (km/h)	4	3.5	3.5
Battery capacity / voltage (Ah / V)	225 / 4x6	225 / 4x6	225 / 4x6
Tyres	Solid non-marking	Solid non-marking	Solid non-marking
Platform weight (kg)*	1503	1959	2812